

SL60-VF




Reliable Technical Data

- Rated Input Voltage:200-240VAC
 - Input Frequency:50/60Hz
 - Output Power:60W/75W
 - Body: PC
 - Open Circuit; Short Circuit; Over Load;
 - Over Heat Protection
- Safety According to EN61347-1, EN61347-2-13
 - EMI According to EN55015
 - EMS According to EN61000-3-2; EN61000-3-3; EN61547
 - EMF According to EN62493-2010
 - ERP According to EN1194-2012

SL75-VF



Dimension in mm

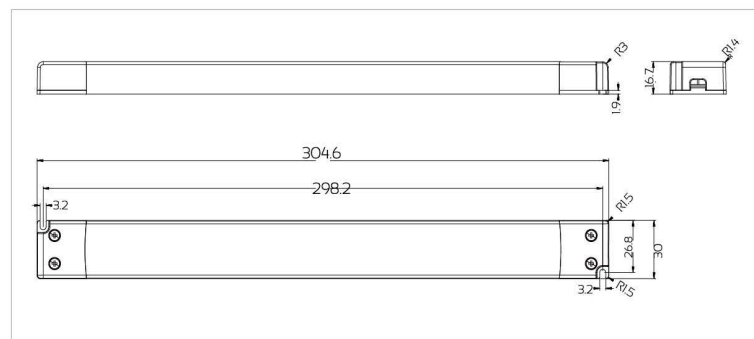

Characteristics

Rated input voltage: AC200-240V 50/60Hz (power factor measured at AC230V and full load)

Model No.	Constant output voltage	Load	Max output current	PF	Ta	Tc	L x W x H
SL60-12VF	12V	0-60W	5.0A	≥0.9	45°C	80°C	304.6x30x16.7
SL60-24VF	24V	0-60W	2.5A	≥0.9	45°C	80°C	304.6x30x16.7
SL75-12VF	12V	0-75W	6.25A	≥0.9	45°C	80°C	304.6x30x16.7
SL75-24VF	24V	0-75W	3.125A	≥0.9	45°C	80°C	304.6x30x16.7

