

## SNP100-VF-1/SNP100-VF-1S




### Reliable Technical Data

- Rated Input Voltage:200-240VAC
  - Input Frequency:50/60Hz
  - Output Power:100W
  - Body: PC
  - Open Circuit; Short Circuit; Over Load;
  - Over Heat Protection
- 
- Safety According to EN61347-1, EN61347-2-13
  - EMI According to EN55015
  - EMS According to EN61000-3-2; EN61000-3-3; EN61547
  - EMF According to EN62493-2010
  - ERP According to EN1194-2012



### Dimension in mm

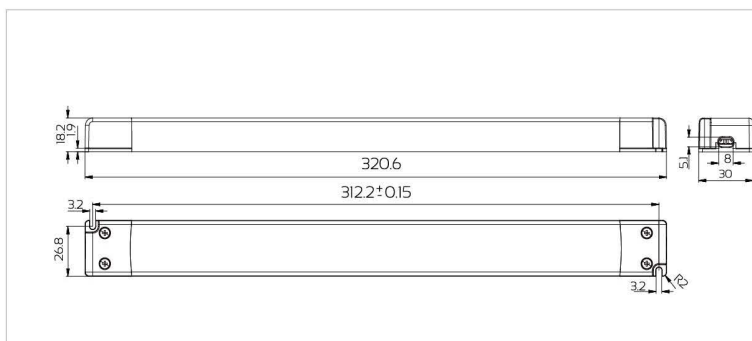

### Characteristics

Rated input voltage: AC200-240V 50/60Hz (power factor measured at AC230V and full load)

| Model No.      | Constant output voltage | Load   | Max output current | PF   | Ta   | Tc   | L x W x H     |
|----------------|-------------------------|--------|--------------------|------|------|------|---------------|
| SNP100-12VF-1  | 12V                     | 0-100W | 8.33A              | ≥0.9 | 45°C | 85°C | 320.6x30x18.2 |
| SNP100-24VF-1  | 24V                     | 0-100W | 4.17A              | ≥0.9 | 45°C | 85°C | 320.6x30x18.2 |
| SNP100-12VF-1S | 12V                     | 0-100W | 8.33A              | ≥0.9 | 45°C | 85°C | 320.6x30x18.2 |
| SNP100-24VF-1S | 24V                     | 0-100W | 4.17A              | ≥0.9 | 45°C | 85°C | 320.6x30x18.2 |

SELV V10 V

