



LED POWER SUPPLY DATASHEET

SS60-24VF

·DESCRIPTION

High Cost Performance, Products meet the SELV standard. The circuit design has open circuit, short circuit, overload and over temperature protection. Comply with low standby power consumption standard according to ERP instruction. Lifetime is over 50,000hrs.



-Input

Items	Conditions	Request	Note
Input voltage	Ta	AC220-240Vac	--
Input frequency		50/60Hz	--
Input current		<0.35A	230V/50HZ
Input power	25°C,rated input voltage, output with max. rated load	<68W	
Efficiency		88%	
Standby	25°C,rated input voltage, output without load	<0.5W	average
Inrush current	25°C,rated input voltage	<30A	230V/50HZ
PF	25°C,rated input voltage, output max. rated load	≥0.98	230V/50HZ
Total harmonic distortion	25°C,rated input voltage, output max. rated load	<10%	230V/50HZ

-Output

Output		Items	Conditions	Request	Note
Startup time		25°C, rated input voltage,output with max. rated load		<0.5S	230V
Output voltage and precision		Ta , rated input voltage, output with rated load		24V±5%	--
Output current range		Ta ,rated input voltage		0-2.5A	--
Output voltage wave		25°C, rated input voltage,output with max. rated load		<3%	Vp-p
Output overload		25°C,rated input voltage,output with 2 times LED load		--	--
Output current and precision		Ta , rated input voltage, output with rated load		--	--
Rated output voltage range		Ta , rated input voltage		--	--
Output current wave		25°C, rated input voltage,output with max. rated load		--	Ip-p

• Temperate and others

Item	Conditions	Request	Note
Operation temp.	--	-20-45℃	--
Relative humidity	--	10%-90%	--
Max. case temp.	--	90℃	--
Lifetime	Max.Ta,rated input voltage,output with max.rated load	50,000hr	--
MTBF	Max.Ta,rated input voltage,output with max.rated load	200,000hr	
Working noise	25℃,rated input voltage,output with rated load,static speakers background noise<35dB, pick up head is 10cm far away from product	yes	--

- Mechanical, mounting

Items	Conditions
Case material and size	Plastic case L159.9*W57.8*H18mm
Mounting ways	Independent
Insulation type	Class II
IP grade	IP20
Input cables dimension	Terminal
Output cables dimension	Terminal
Output cables length	2M max


• Protection

Items	Conditions	Request	Note
Open circuit	Ta, rated input voltage, output without load	yes	--
Over load	Ta ,0.94-1.06 times of input voltage, 1.3 times of rated power	yes	--
Short circuit	Ta ,0.94-1.06 times of input voltage	yes	--
Over temperature	Ta ,0.94-1.06 times of input voltage, temperature detected pointed more than 115 degree	yes	--
Over voltage	Ta ,0.94-1.06 times of input voltage, 1.5 times of rated one	yes	--
Auto recovery	After over temperature,over load, short circuit protection revocation	yes	--
Latch off	Over temperature,over load, short circuit restart should after cut off	--	--

-Standard

Items	Conditions
Safety	IEC61347-1、IEC61347-2-13
Harmonic	IEC61000-3-2 Class C
EMI	EN55015
EMS	EN61547

Dimensions(mm)

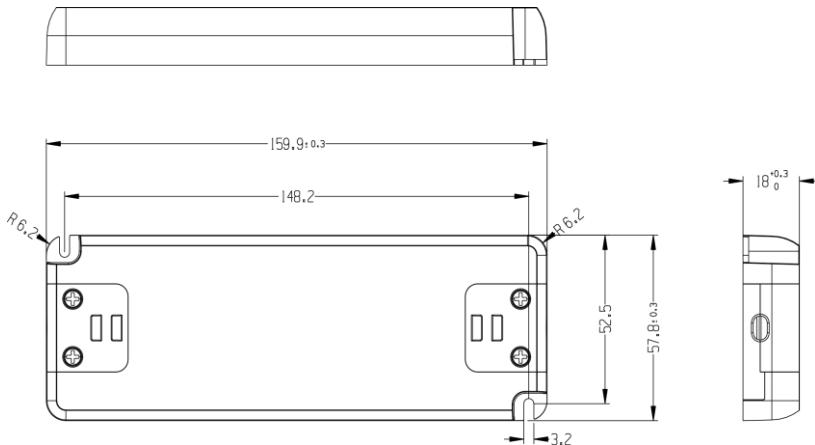

Wiring Diagram

